



# Affordable Precision GNSS Antennas

What is your application? **We can help!**

Precision OEM and Housed: Single, Dual, Triple and Full-Band antennas with optional L-Band support

**Accutenna®**, **Helical**, **VeroStar™**, and **VeraPhase®** Technologies

## Accutenna® Technology


Provides low axial ratio and high multipath signal rejection. Suitable for the most demanding applications.

### Features



- Lightweight Single, Dual, Triple, and L-Band Corrections
- Very low-current options
- Patented Accutenna® Technology
- Pre-filtering options available
- Antenna customization (tuning, cables, connectors, radomes)
- Short lead times

**Learn More:** [accutenna.tallysman.com](http://accutenna.tallysman.com)


**Tight Phase Centre**

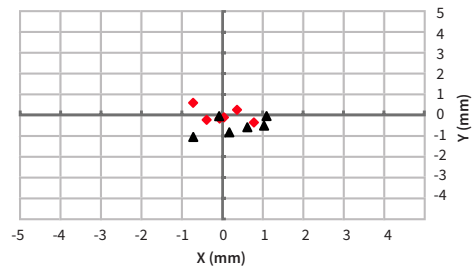

**Great X-Pol Rejection**

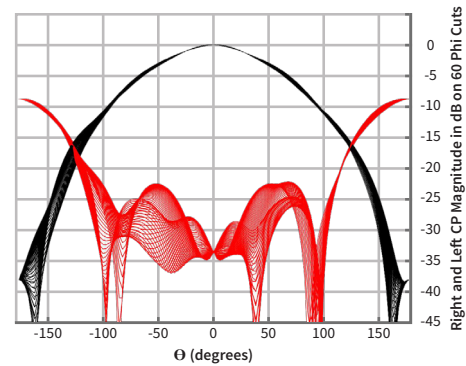

**TW1700 Series**  
Embedded Single Band Antennas



**TW1800 Series**  
Embedded Dual Band Antennas



**TW2000 Series**  
Single Band Antennas



**TW3000 Series**  
Single, Dual, and Triple Band Antennas



**TW3000 Series**  
Embedded Single, Dual, and Triple Band Antennas



**TW4000 Series**  
Single Band GNSS and Iridium Antennas



**TW7000 Series**  
Dual and Triple Band Antennas



**TW8000 Series**  
Dual Band Antennas

## Helical Technology

Unprecedented performance in a lightweight, military grade IP69K compliant form factor

### Features

- Provides Single, Dual, Triple, and L-Band coverage
- Extremely lightweight (5g (OEM) - 37g)
- Novel Helical element
- Excellent axial ratio
- Low noise amplifier and pre-filter
- Embedded models coming soon



**HC600**

Iridium  
Antenna

**HC871**

Dual Band  
Antenna

**HC977**

Triple Band  
Antenna + L-Band

[Learn More: helical.tallysman.com](http://helical.tallysman.com)

Model	Frequencies	Mounting
HC600	Iridium	Surface Mount / Direct Screw
HC771	L1, G1, E1, B1	Surface Mount / Direct Screw
HC871	L1/L2, G1/G2, E1, B1	Surface Mount / Direct Screw
HC872	L1/L2, G1/G2, E1, B1, L-Band Corrections	Surface Mount / Direct Screw
HC882	L1/L2, G1/G2/G3, E1/E5b, B1/B2, L-Band Corrections	Surface Mount / Direct Screw
HC977	L1/L2/L5, G1/G2/G3, E1/E5a/E5b, B1/B2/B2a, L-Band Corrections	Surface Mount / Direct Screw

## VeroStar™ Technology

Precise, accurate, robust, lightweight survey grade antenna

### Features

- Patent pending innovative Full Band Antenna element
- Models provide GNSS Band and L-Band support
- Excellent radiating pattern with low roll-off for excellent low elevation tracking
- Phase Centre Offset estimated
- Tight Phase Centre ( $\pm 2$  mm)
- Excellent axial ratio for improved multipath rejection
- Innovative low-noise amplifier with superior out of band filtering
- Waterproof with IP69K compliance
- Embedded models coming soon



**VeroStar™**

GNSS Band and L-Band  
Antenna

[Learn More: verostar.tallysman.com](http://verostar.tallysman.com)

Model	Frequencies	Mounting
VSP6037L	All Bands, L-Band Corrections	Pole / Pipe
VSP6137	L1, G1, E1, B1	Pole / Pipe
VSP6237	L1/L2, G1/G2, E1, B1	Pole / Pipe
VSP6337	L1/L2/L5, G1/G2/G3, E1/E5a/E5b, B1/B2/B2a	Pole / Pipe
VSP6537	L1/L5, G1, E1/E5a, B1/B2a	Pole / Pipe

## VeraPhase® Technology

### Features

- Patented Full / Triple / Dual GNSS Bandwidth Antennas + L-Band option
- 35dB and 50dB gain models available
- Extremely tight phase centre variation ( $\pm 1$  mm) and excellent PCV repeatability
- TNC or N connector
- Exceptionally low axial ratio from Zenith to Horizon ( $< 2$  dB) resulting in excellent multipath rejection
- Innovative low noise amplifier and filter to mitigate Ligado and LTE



**VP6000 Series**  
VeraPhase® Antennas

Model	Frequencies	Mounting
VP6000	L1/L2/L5, G1/G2/G3, E1/E5a/E5b/E6, B1/B2/B2a/B3, L6, L5, L-Band Corrections	Standard Survey Mount
VP6200	L1/L2, G1/G2/G3, E1/E5b, B1/B2, L-Band Corrections	Standard Survey Mount
VP6300	L1/L2/L5, G1/G2/G3, E1/E5a/E5b, B1/B2/B2a	Standard Survey Mount

## VeraChoke® Technology

### Features

- Efficient VeraPhase Antenna element
- 50dB LNA gain
- Three dimensional choke ring to mitigate multipath
- N-Type connector
- Available with or without SCIGN radome
- Extremely tight phase centre variation ( $\pm 0.5$  mm) and superior PCV repeatability



**VC6050**  
VeraChoke® Antenna

Model	Frequencies	Mounting
VC6050	L1/L2/L5, G1/G2/G3, E1/E5a/E5b/E6, B1/B2/B2a/B3, L6, L-Band Corrections	Standard Survey Mount
VC6150	L1/L2/L5, G1/G2/G3, E1/E5b/E6, B1/B2/B2a/B3	Standard Survey Mount

Learn More: [vera.tallysman.com](http://vera.tallysman.com)

**About Tallysman:** With global headquarters and manufacturing in Ottawa, Canada, Tallysman is a leading manufacturer of high-precision antennas and components for Global Navigation Satellite System (GNSS) applications. Tallysman's mission is to support the needs of a new generation of positioning systems by delivering unprecedented antenna precision at competitive prices. Learn more at [www.tallysman.com](http://www.tallysman.com)

**Contact us:**  
[info@tallysman.com](mailto:info@tallysman.com)  
T: +1 613 591-3131

© 2019 Tallysman Inc. All rights reserved. Tallysman, the "When Precision Matters" tag line and the Tallysman logo are trademarks or registered trademarks of Tallysman Inc. and/or its affiliates in Canada and certain other countries. All other trademarks mentioned in this document are the property of their respective owners. The information presented is subject to change without notice. Tallysman assumes no responsibility or any errors or omissions in this document. Tallysman Wireless Inc. hereby disclaims any or all warranties and liabilities of any kind.